


G.I FLEXIBLE CONDUIT

G.I FLEXIBLE CONDUIT WITH PVC COATED

Kedbrooke GI Flexible Conduit with PVC coating is intended to protect cables in applications where there is repeated flexing, vibration and bending. When installing wiring systems, adherence to the current wiring regulations is strongly advised.

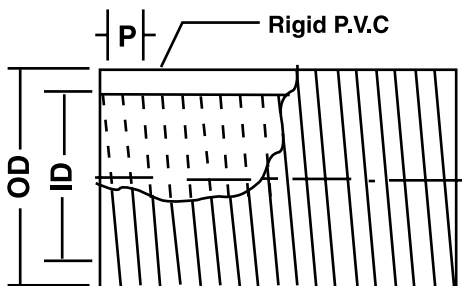

CODE No.	Outer Dia	Inner Dia	Thickness Of Steel Strip (Width*thickness)
KFC-20	20MM	16.5MM	8.6*0.22MM
KFC-25	25MM	21.0MM	9.5*0.22MM
KFC-32	32MM	27.5MM	12.7*0.25MM
KFC-40	43MM	38.0MM	12.7*0.28MM
KFC-50	52MM	46.0MM	17*0.35MM